

Flexi-Tank 220 & 300

configuration flexibility by design

- 1/ Cold feed 20mm. (Female)
- 2/ TPR Valve port. (Female)
- 3/ DHW Reticulation return port 20mm. (Female)
- 4/ Anode for additional protection. (Female)
- 5/ DHW outlet port. (Female)

Coils 22mm OD

Rating Coil A 21 Kw -- Coil B 14 Kw

- 6/ 20mm (Male) Coil 2 in (300L only)
- 7/ 20mm (Male) Coil 2 out (300L only)
- 8/ 20mm (Male) Coil 1 In
- 9/ 20mm (Male) Coil 1 out

All coil connections are flat face swivel union washer.

- 10/ 20mm (F) Drain valve port (or*)

*Ports 3 and 10 can be utilised as optional hydronic circuit ports, Eg: solar.

220L has one element port (Element supplied)

300L has 2 x Element ports, The second may be used for Solar PV DC input

(both ports are pre fitted with thermostats 1 x 3kw element and 1 blanking plug is supplied)


P 3 x option sensor pockets

Off the floor feet


modern easy clean gloss white shell with black cap and base.

Coils can be Pumped or Thermosyphon

Upper coil can be for input or extraction.

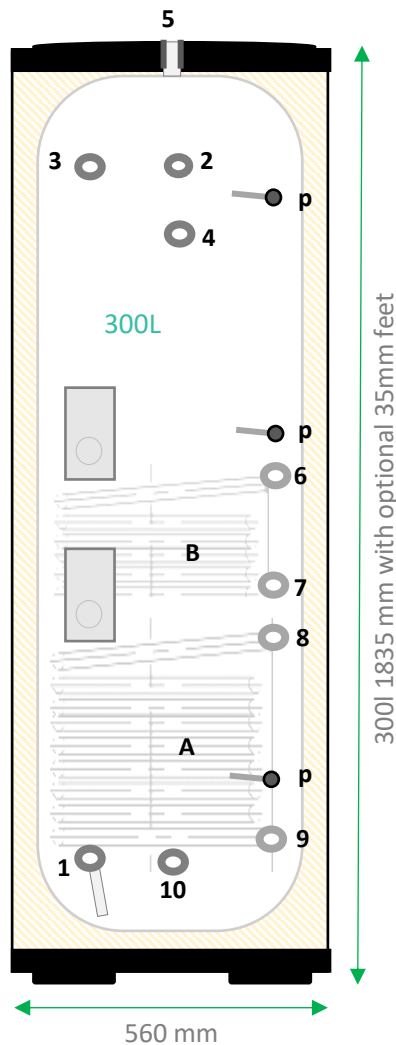

Flexi-Tank, designed and developed to give installers & users a competitively priced solution to the specific needs of Kiwi homes efficiently and effectively.

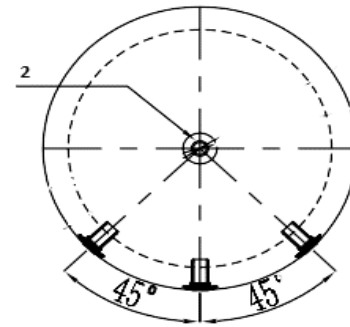

DUPLEX SS

300L shown



Efficiently Compatible with.....







HEATLOGIC

Flexi-Tank 220L

Mains pressure

Single coil DUPLEX SS

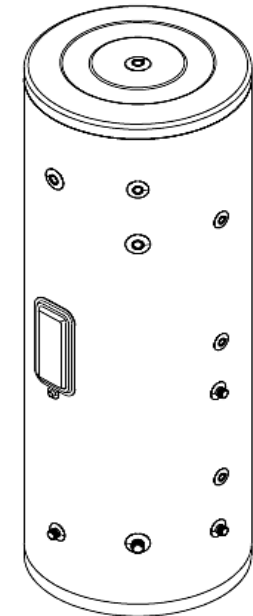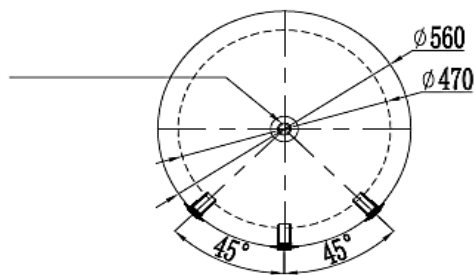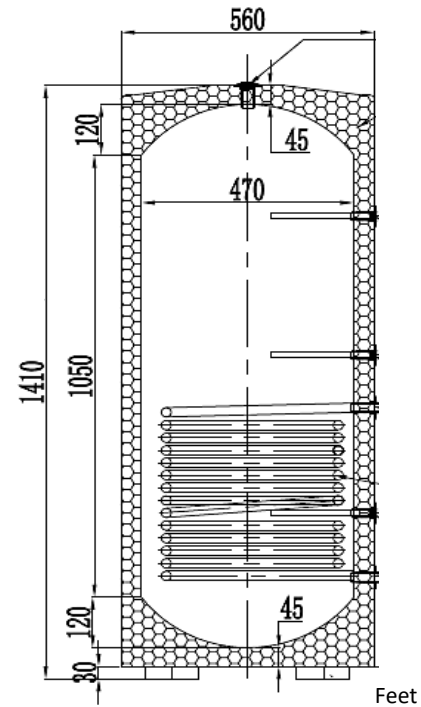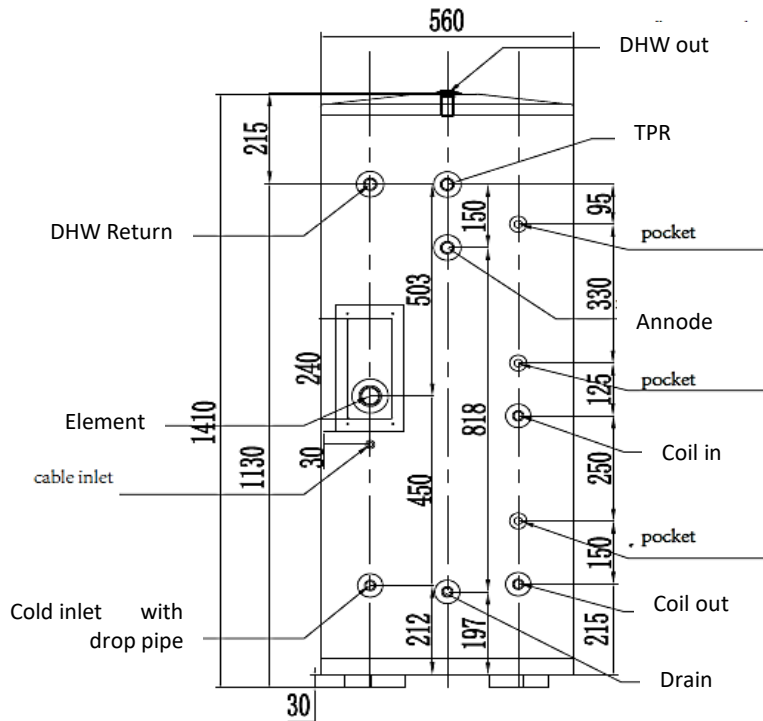

Flexi-Tank 300L

Mains Pressure

Twin coil **DUPLEX SS**

